



Mini Low Pass Filters

Range of eleven Low Pass Filter covering from 300KHz to 500MHz offering the benefits of LC design, low insertion loss, high power handling and controlled group delay.

Suitable for:



Measurement, Receivers, Exciters, RF Generators, Local oscillators, RF amplifiers, RF mixers, etc.



Features:

- Topology: Passive, 7th order, Elliptic
- Input/Output impedance: 50 Ohm.
- Insertion loss: < 0.3 dB
- Sharp roll-off: High Stop band attenuation: see plots.
- Power rating: 27dBm
- Connectors: BNC or SMA available
- Size: 56mmx20mmx20mm(2.205x0.787x0.787in)

Range of frequencies: (3dB cut-off frequency)

300KHz- 600KHz- 1.5MHz- 3MHz- 6MHz - 15MHz - 30MHz- 60MHz - 150MHz- 300MHz- 500MHz

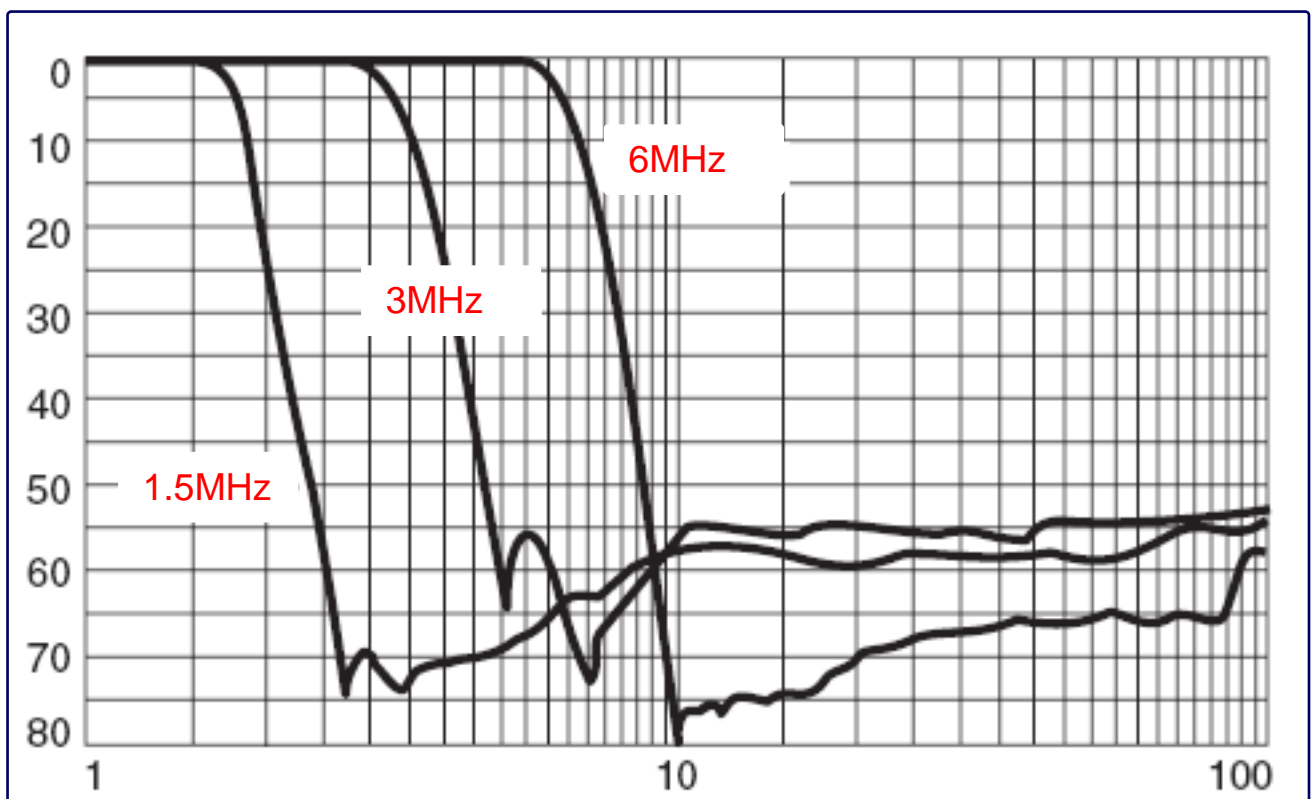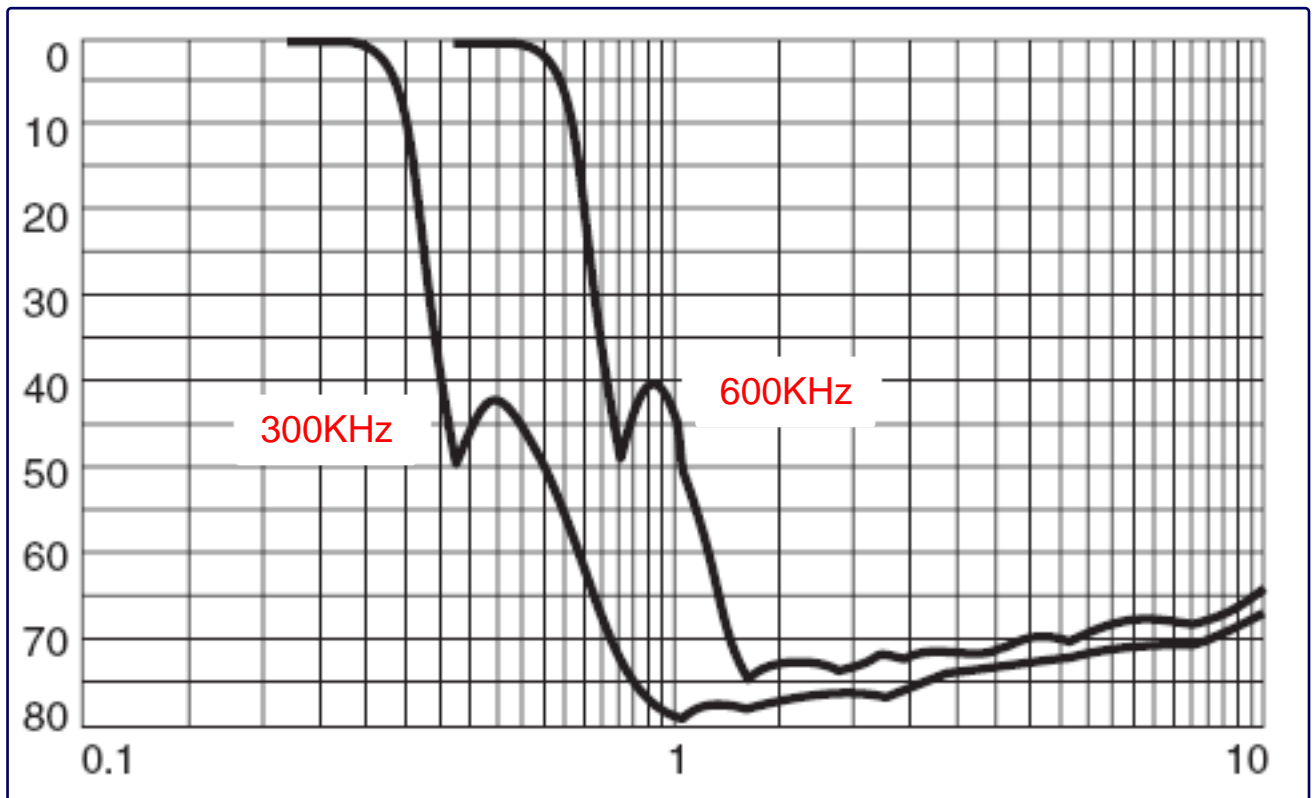

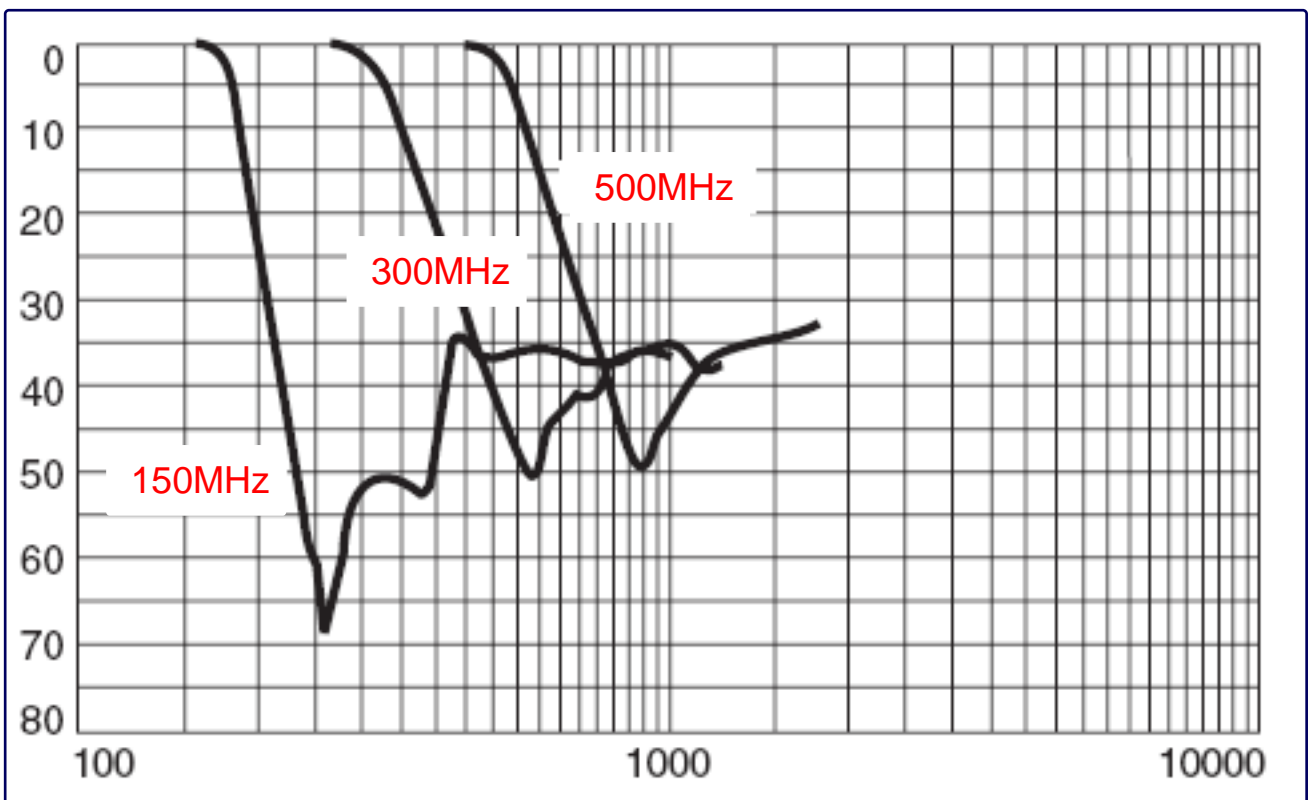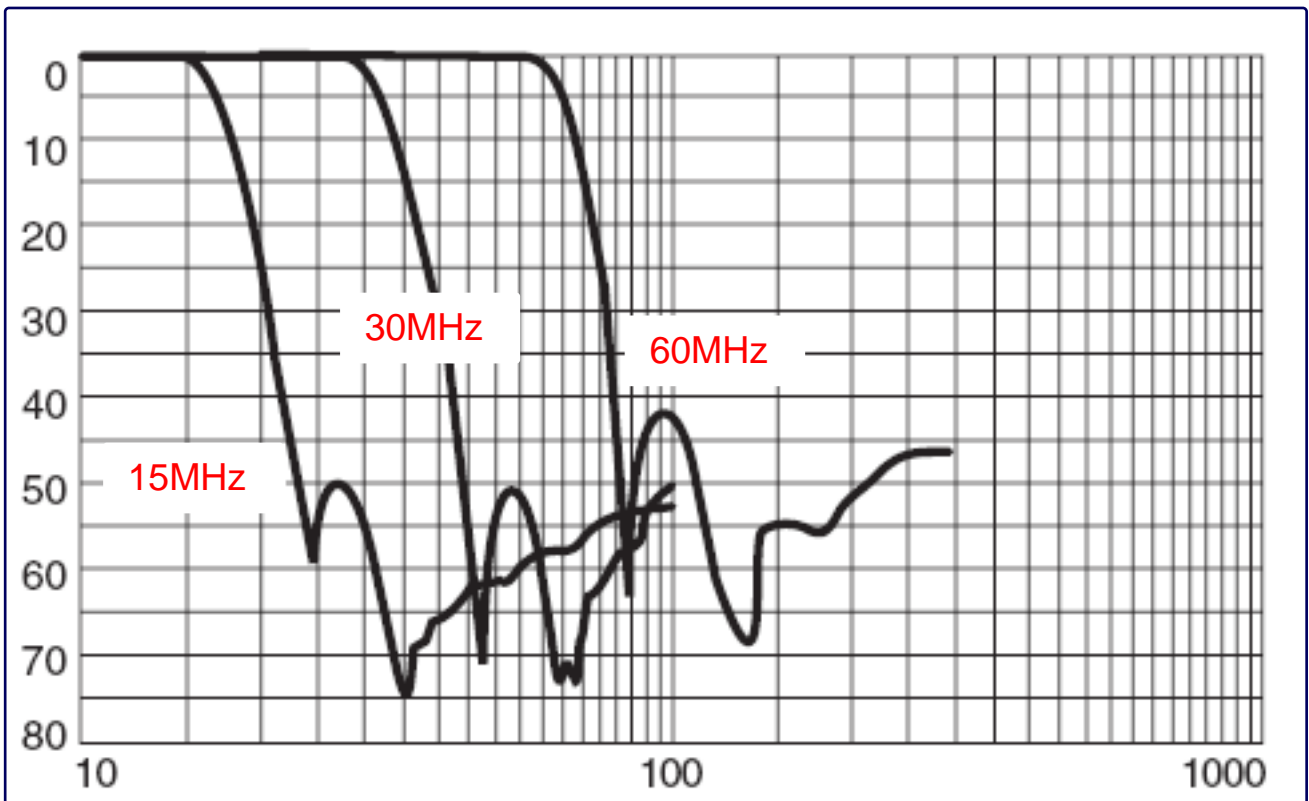

NOTES:

Heros technology Limited disclaims all liability arising from this information and its use.

It is your responsibility to ensure that your application meets with your specifications.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates.

Heros technology Limited makes no representations or warranties of any kind whether express or implied, written or oral, statutory or otherwise, related to the information, including but not limited to its condition, quality, performance, merchantability or fitness for purpose.