


# VTM1050-10

- Material:** Phenolic (Black)
- Rating:** UL 94-VO
- 10 Terminals:** Copper Wire  
.040 Dia. (#18 AWG)  
100% Tin Plated
- Solderability:** Per MIL-STD-202  
Method 208
- Packaging Tray:** TY122x140-A
- Application:** For vertical mounting of wound toroids up to 1.1 inches in diameter requiring up to 10 terminations.

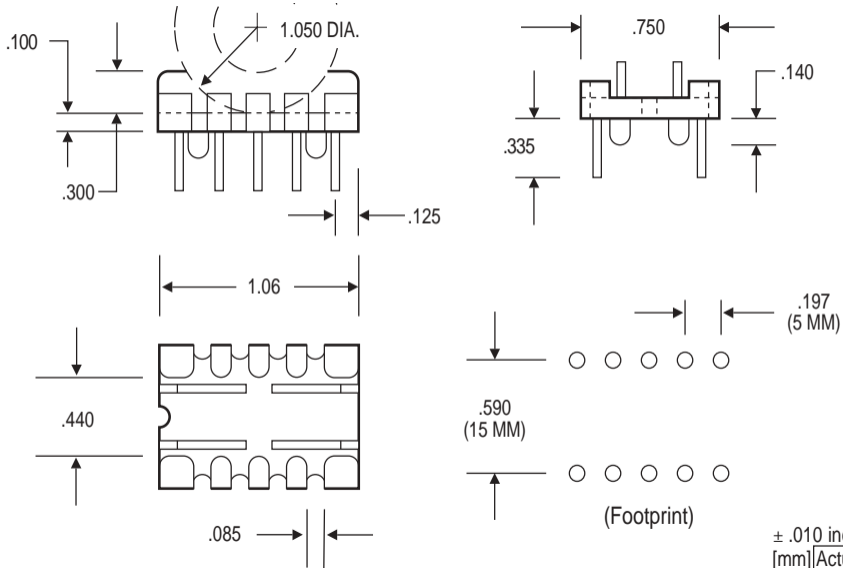

± .010 inches  
[mm] Actual Size